




ProAction Thrust™ Floor System

SYSTEM TYPE: FLOATING RESILIENT

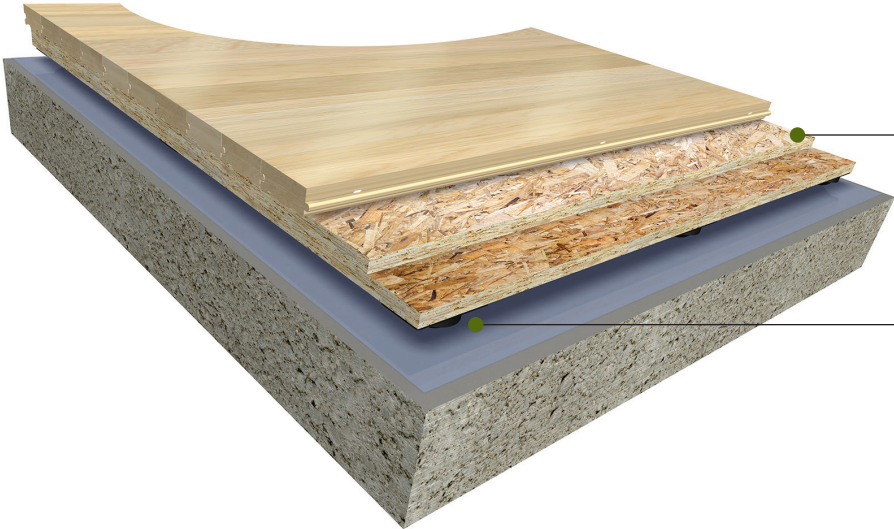

Double layer of 15/32" (12 mm) thick APA exposure 1 rated sheathing minimum APA span rating of 32/16

ProAction 3/4" (19 mm) Natural Rubber Pads

MFMA NORTHERN HARD MAPLE BY ACTION:

Random Length (RL)
Action Long Length (FJ)
Expansion Ridge Technology (ERT)

TESTING AGENCY:

Certified by ISSS

PERFORMANCE MEETS OR EXCEEDS:

MFMA PUR Compliant
DIN 18032 Part 2
FIBA Level 1
EN 14904

SLAB DEPRESSION:

25/32" (20 mm): 2-1/2" (64 mm)
33/32" (26 mm): 2-3/4" (70 mm)

LEED:

FSC Maple & Subfloor available, MR credits — based on products, selected materials and facility locations

PERFORMANCE & SYSTEM STABILITY:

- Variable load response ProAction pads
- Excellent ball bounce
- SCORES Compliant
- Stable double layer subfloor system
- Excellent shock absorption



3D BIM files online now see us at Sweets.com




ISO 14000:2004 VERIFIED

- ProAction Thrust is well suited to applications where high performance is important and FIBA certification is desired.
- Features the proven, durable double layer 15/32" (12 mm) subfloor design.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.

Complete product specifications and system drawings (CAD and BIM) are available online at:

www.actionfloors.com

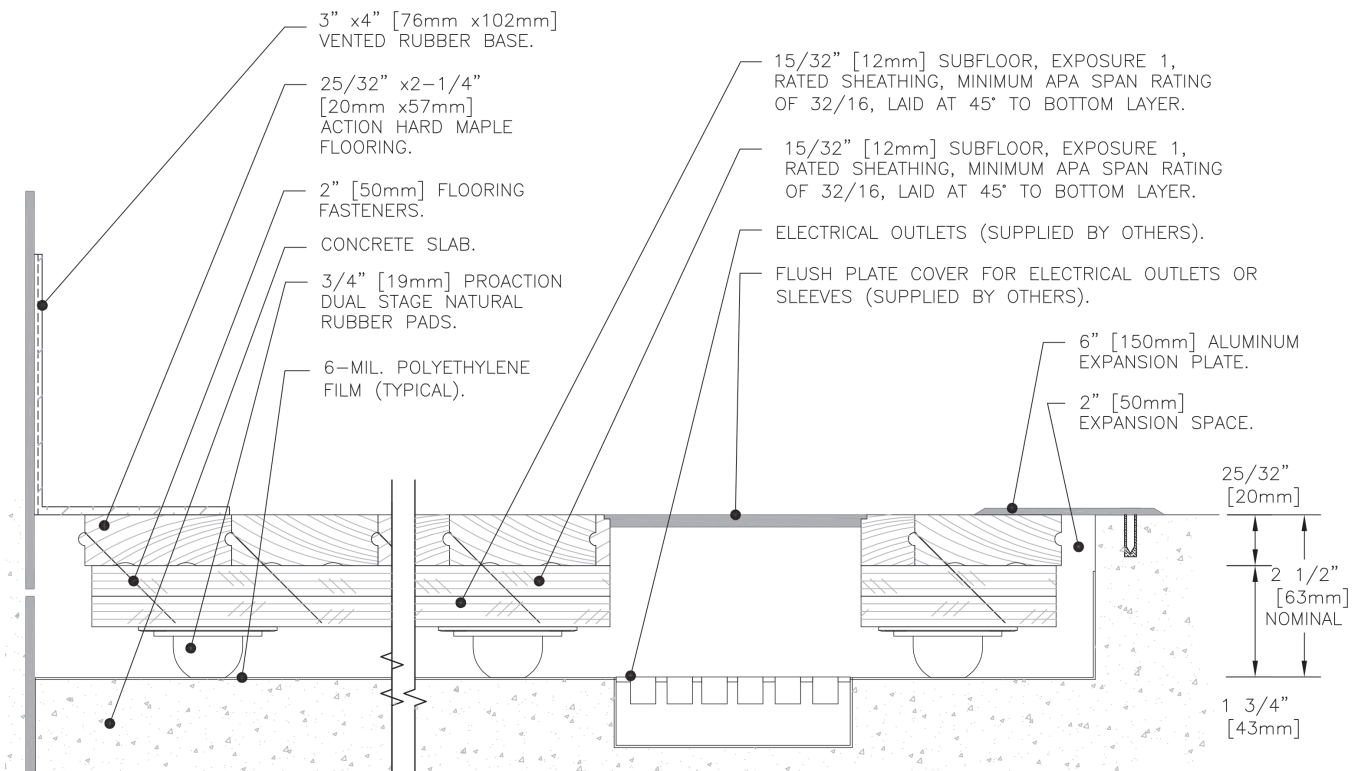

Action ProAction Thrust



ACTION FLOOR SYSTEMS LLC
4781 N. U.S. Hwy. 51 • Mercer, WI 54547-9708 U.S.A.

PHONE: 800.746.3512 or 715.476.3512 • FAX: 715.476.3585

E-MAIL: info@actionfloors.com

www.actionfloors.com

