

Traditional field houses, gymnasiums, aerobic and dance floors, high performance and competition facilities

PERFORMANCE

Meets or exceeds DIN18032-Part II / EN 1490-2006

PERFORMANCE CHARACTERISTICS

Shock Absorption	V
Vertical Deflection	V
Area of Deflection	V
Ball Bounce	V
Surface Friction (Coefficient of Friction/Sliding Coefficient)	V
Rolling Load	V

SPECIFICATIONS

System Thickness*/Pad Options 25/32" MFMA Horner Maple:

1 7/8" Floor using standard 7/16" SAFE pad

1 3/4" Floor using 1/4" foam pad and 3/8" rated sheathing

2" Floor using 3/4" SAFE pad and 1/2" rated sheathing

33/32" MFMA Horner Maple: Add 1/4"

*System Thickness is equivalent to slab depression for new facilities.

MATERIALS

Option: Specify Horner LongLife Maple Subfloor: Rated sheathing Optional closed-cell foam pad Modified steel drive pin anchors Vapor retarder

GREEN/LEED OPTIONS


FSC Maple Flooring	MRc 7
FSC Subfloor Components	MRc 7 Exemplary Performance

INSTALLATION REFERENCES

New Kent High School, New Kent, VA Paonia High School, Paonia, CO U.S. Basketball Association, Louisville, KY Dumars Residence, Bingham Farms, MI Greenbriar, White Sulphur Springs, WV

> Please contact us regarding our extended maintenance warranty options.



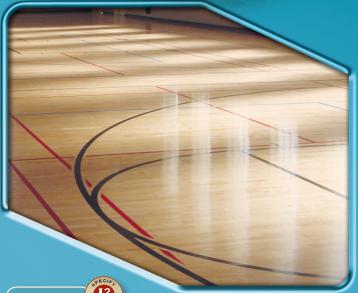

For extended wear life, choose **Long Life**TM. Horner's **Long Life**TM 33/32" flooring. **Long Life™** provides the ecological, cost savings and

HORNER FLOORING is the leading manufacturer of athletic flooring systems used in high-school gyms, college and







HORNER FLOORING COMPANY, INC. 800.380.0119 / www.hornerflooring.com

P.O. Box 380, 23400 Hellman Avenue, Dollar Bay, MI 49922 P: 906.482.1180 / F: 906.482.6115 / info@hornerflooring.com