

## Tournament Pro Sport®


Manufactured from natural wood, Tournament Pro Sport® floors have high technical characteristics and are intended for interiors used for training and hosting competitions of all levels, including local and international events, in basketball, volleyball, handball, squash etc.




- Coswick solid sports flooring  
(thickness 19,05 mm)
- Plywood  
(thickness 9 mm)
- Bracket
- Coswick resilient batten  
(thickness 27 mm)
- Shock absorbing element of variable rigidity  
(thickness 16 mm)
- Hydroisolating polyethylene film
- Base

Intended Use	Product is intended for speciality indoor courts used for team sports and ball games; recommended for interiors with strict requirements in regards to the technical characteristics of the floor.
Technology	Solid wood flooring planks, manufactured from hardwood species, installed over custom shock-absorbing, anti-vibrational base. Product has "deck"-style surface pattern.
Compliance with	<ul style="list-style-type: none"> <li>Shock absorption, % 66   EN 14808 (A4 ≥55% &lt;75%)</li> <li>Vertical deformation, mm 3,5   EN 14809 (A4 ≥2,3 &lt;5,0)</li> <li>Friction, nominal unit 94   EN 13036-4 (80-110)</li> <li>Ball bounce, % 91   EN 12235 (≥90%)</li> <li>Rolling load, mm 0,21   EN 1569 (≤ 0,5 mm, min. 1500 H)</li> </ul>
Top Layer	<ul style="list-style-type: none"> <li>Species Oak, ash</li> <li>Construction Solid hardwood flooring</li> <li>Dimensions 19,05x57,15 (82,55) x300...1850 mm</li> </ul>
Subfloor	Highly durable plywood base over resilient battens and shock-absorbing anti-vibrational elements and variable rigidity.
System Type	Permanent stationary system, installed using floating method.
Warranties	Lifetime Structural Integrity Warranty

### Baseboard and Reducer

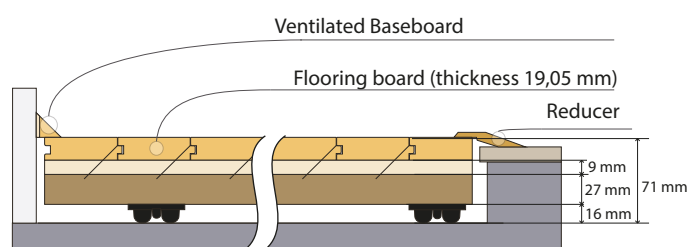

### Serviceable Cable Channel

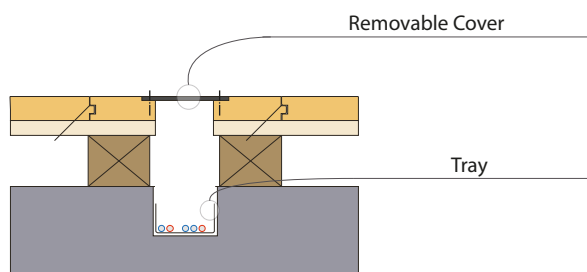

### Breakout Box

